

## FEATURES

- ▶ Smallest Encapsulated 40W Converter!
- ▶ Package Size 2.0"x 1.0"x 0.4"
- ▶ Wide 2:1 Input Range
- ▶ Excellent Efficiency up to 92%
- ▶ Operating Temp. Range -40°C to +80°C
- ▶ Over-temperature Protection
- ▶ I/O-isolation Voltage 1500VDC
- ▶ Remote On/Off Control
- ▶ Shielded Metal Case with Isolated Baseplate
- ▶ Optional Heatsink
- ▶ 3 Years Product Warranty

**NEW**



## PRODUCT OVERVIEW

The MINMAX MKW40 series is a new generation of high performance dc-dc converter modules setting a new standard concerning power density. The product offers fully 40W in an encapsulated, shielded metal package with dimensions of just 2.0"x1.0"x0.4". All models provide wide 2:1 input voltage range and precisely regulated output voltages.

Advanced circuit topology provides a very high efficiency up to 92% which allows an operating temperature range of -40°C to +80°C. Further features include remote On/Off, trimmable output voltage, under-voltage shutdown as well as overload and over-temperature protection.

Typical applications for these converters are battery operated equipment, instrumentation,distributed power architectures in communication and industrial electronics and many other space critical applications.

### Model Selection Guide

| Model Number | Input Voltage (Range) | Output Voltage | Output Current |      | Input Current |          | Reflected Ripple Current | Over Voltage Protection | Max. capacitive Load | Efficiency (typ.) |
|--------------|-----------------------|----------------|----------------|------|---------------|----------|--------------------------|-------------------------|----------------------|-------------------|
|              |                       |                | Max.           | Min. | @Max. Load    | @No Load |                          |                         |                      |                   |
| MKW40-12S033 | 12<br>(9 ~ 18)        | VDC            | mA             | mA   | mA(typ.)      | mA(typ.) | 50                       | mA (typ.)               | VDC                  | uF                |
| MKW40-12S05  |                       | 3.3            | 8000           | 0    | 2472          | 120      |                          | 3.9                     | 21000                | 89                |
| MKW40-12S12  |                       | 5              | 8000           | 0    | 3745          | 160      |                          | 6.2                     | 13600                | 89                |
| MKW40-12S15  |                       | 12             | 3333           | 0    | 3745          | 160      |                          | 15                      | 2360                 | 89                |
| MKW40-12D12  |                       | 15             | 2666           | 0    | 3703          | 150      |                          | 18                      | 1510                 | 90                |
| MKW40-12D15  |                       | ±12            | ±1666          | ±145 | 3786          | 70       |                          | ±15                     | 1200#                | 88                |
| MKW40-24S033 | 24<br>(18 ~ 36)       | ±15            | ±1333          | ±110 | 3787          | 60       | 30                       | ±18                     | 750#                 | 88                |
| MKW40-24S05  |                       | 3.3            | 8000           | 0    | 1222          | 75       |                          | 3.9                     | 21000                | 90                |
| MKW40-24S12  |                       | 5              | 8000           | 0    | 1832          | 80       |                          | 6.2                     | 13600                | 91                |
| MKW40-24S15  |                       | 12             | 3333           | 0    | 1831          | 85       |                          | 15                      | 2360                 | 91                |
| MKW40-24D12  |                       | 15             | 2666           | 0    | 1831          | 75       |                          | 18                      | 1510                 | 91                |
| MKW40-24D15  |                       | ±12            | ±1666          | ±145 | 1872          | 50       |                          | ±15                     | 1200#                | 89                |
| MKW40-48S033 | 48<br>(36 ~ 75)       | ±15            | ±1333          | ±110 | 1872          | 45       | 20                       | ±18                     | 750#                 | 89                |
| MKW40-48S05  |                       | 3.3            | 8000           | 0    | 611           | 40       |                          | 3.9                     | 21000                | 90                |
| MKW40-48S12  |                       | 5              | 8000           | 0    | 916           | 50       |                          | 6.2                     | 13600                | 91                |
| MKW40-48S15  |                       | 12             | 3333           | 0    | 906           | 50       |                          | 15                      | 2360                 | 92                |
| MKW40-48D12  |                       | 15             | 2666           | 0    | 906           | 50       |                          | 18                      | 1510                 | 92                |
| MKW40-48D15  |                       | ±12            | ±1666          | ±145 | 936           | 65       |                          | ±15                     | 1200#                | 89                |
|              |                       | ±15            | ±1333          | ±110 | 936           | 65       |                          | ±18                     | 750#                 | 89                |

# For each output

**Input Specifications**

| Parameter                         | Model            | Min.   | Typ. | Max. | Unit |  |
|-----------------------------------|------------------|--|------|------|------|--|
| Input Surge Voltage (1 sec. max.) | 12V Input Models | -0.7   | ---  | 25   | VDC  |  |
|                                   | 24V Input Models | -0.7   | ---  | 50   |      |  |
|                                   | 48V Input Models | -0.7   | ---  | 100  |      |  |
| Start-Up Voltage                  | 12V Input Models | ---  | ---  | 9    |      |  |
|                                   | 24V Input Models | ---  | ---  | 18   |      |  |
|                                   | 48V Input Models | ---  | ---  | 36   |      |  |
| Shutdown Voltage                  | 12V Input Models | ---  | 8.3  | ---  |      |  |
|                                   | 24V Input Models | ---  | 16.5 | ---  |      |  |
|                                   | 48V Input Models | ---  | 33   | ---  |      |  |
| Input Filter                      | All Models       | Pi Filter  |      |      |      |  |
| Conducted EMI                     |                  | Compliance to EN 55022, class A and FCC part 15, class A |      |      |      |  |

**Output Specifications**

| Parameter                | Conditions   | Min. | Typ. | Max.  | Unit              |
|--------------------------|--|------|------|-------|-------------------|
| Output Voltage Accuracy  |  | ---  | ---  | ±1.0  | %                 |
| Output Voltage Balance   | Dual Output, Balanced Loads                          | ---  | ---  | ±2.0  | %                 |
| Line Regulation          | Vin=Min. to Max.                                     | ---  | ---  | ±0.5  | %                 |
| Load Regulation          | Io=25% to 100%                                       | ---  | ---  | ±1.0  | %                 |
| Ripple & Noise (20MHz)   | 3.3V & 5V Output Models                              | ---  | 100  | ---   | mV <sub>P-P</sub> |
| Ripple & Noise (20MHz)   | 12V & 15V Models                                     | ---  | 150  | ---   | mV <sub>P-P</sub> |
| Ripple & Noise (20MHz)   | Dual Output Models                                   | ---  | 150  | ---   | mV <sub>P-P</sub> |
| Transient Recovery Time  | 25% Load Step Change                                 | ---  | 250  | ---   | µs                |
| Temperature Coefficient  |  | ---  | ---  | ±0.02 | %/°C              |
| Over Load Protection     | Current Limitation at 150% typ. of Iout max., Hiccup |      |      |       |                   |
| Short Circuit Protection | Hiccup Automatic Recovery                            |      |      |       |                   |

**General Specifications**

| Parameter                     | Conditions                        | Min.    | Typ. | Max. | Unit  |
|-------------------------------|-----------------------------------|---------|------|------|-------|
| I/O Isolation Voltage (rated) | 60 Seconds                        | 1500    | ---  | ---  | VDC   |
| I/O Isolation Resistance      | 500 VDC                           | 1000    | ---  | ---  | MΩ    |
| I/O Isolation Capacitance     | 100KHz, 1V                        | ---     | ---  | 1500 | pF    |
| Switching Frequency           |                                   | ---     | 320  | ---  | KHz   |
| MTBF(calculated)              | MIL-HDBK-217F@25°C, Ground Benign | 328,000 | ---- | ---- | Hours |

**Input Fuse**

| 12V Input Models      | 24V Input Models      | 48V Input Models      |
|-----------------------|-----------------------|-----------------------|
| 8000mA Slow-Blow Type | 4000mA Slow-Blow Type | 2000mA Slow-Blow Type |

**Remote On/Off Control**


| Parameter                   | Conditions                   | Min. | Typ. | Max. | Unit |
|-----------------------------|------------------------------|------|------|------|------|
| DC/DC On                    | 3.5V ~ 12V or Open Circuit   |      |      |      |      |
| DC/DC Off                   | 0V ~ 1.2V or Short Circuit   |      |      |      |      |
| Control Input Current (on)  | Vctrl = 5.0V                 | ---  | 0.5  | ---  | mA   |
| Control Input Current (off) | Vctrl = 0V                   | ---  | -0.5 | ---  | mA   |
| Control Common              | Referenced to Negative Input |      |      |      |      |
| Standby Input Current       | Nominal Vin                  | ---  | 2.5  | ---  | mA   |

**Output Voltage Trim**

| Parameter            | Conditions                  | Min. | Typ. | Max. | Unit |
|----------------------|-----------------------------|------|------|------|------|
| Trim Up / Down Range | % of nominal output voltage | ±10  | ---  | ---  | %    |


**Environmental Specifications**

| Parameter                                     | Conditions                     | Min. | Max. | Unit     |
|---|--------------------------------|------|------|----------|
| Operating Temperature Range (with Derating)   | Ambient                        | -40  | +80  | °C       |
| Case Temperature                              |                                | ---  | +105 | °C       |
| Storage Temperature Range                     |                                | -50  | +125 | °C       |
| Humidity (non condensing)                     |                                | ---  | 95   | % rel. H |
| Cooling                                       | Free-Air convection            |      |      |          |
| RFI   | Six-Sided Shielded, Metal Case |      |      |          |
| Lead Temperature (1.5mm from case for 10Sec.) |                                | ---  | 260  | °C       |

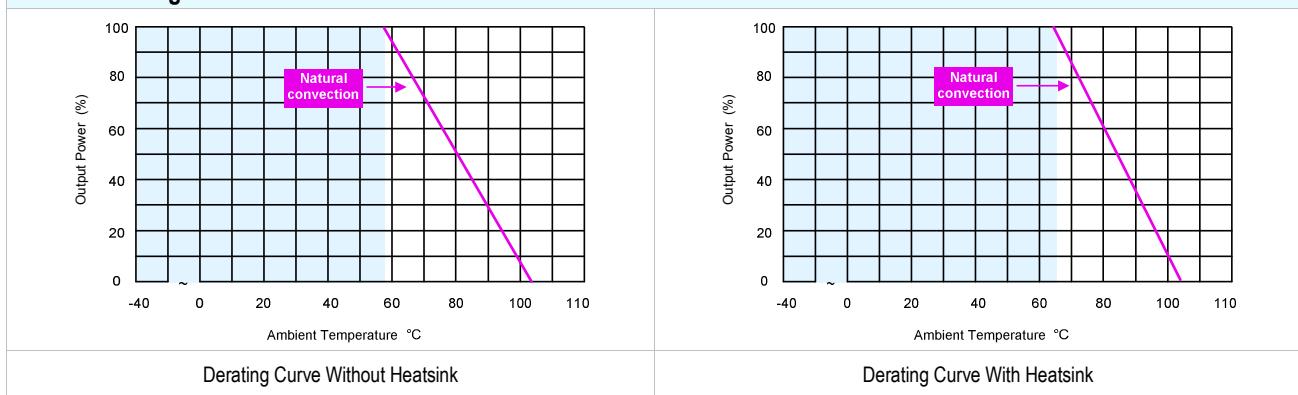**Power Derating Curve**

**Notes**

- 1 Specifications typical at  $T_a=+25^{\circ}\text{C}$ , resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
- 3 Ripple & Noise measurement bandwidth is 20 MHz, measured with a 1uF M/C and a 10uF T/C.
- 4 All DC/DC converters should be externally fused at the front end for protection.
- 5 Other input and output voltage may be available, please contact factory.
- 6 To order the converter with heatsink, please add a suffix H.
- 7 To order the converter without Remote On/Off function, please add a suffix -N (e.g.MKW40-12S05-N).
- 8 Specifications subject to change without notice.
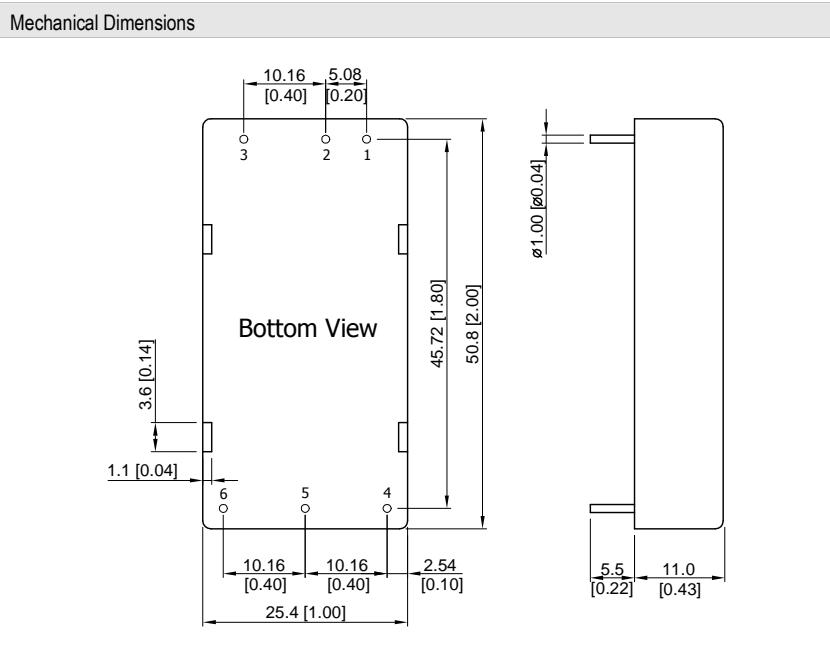
## Package Specifications




| Pin Connections |               |               |
|-----------------|---------------|---------------|
| Pin             | Single Output | Dual Output   |
| 1               | +Vin          | +Vin          |
| 2               | -Vin          | -Vin          |
| 3               | Remote On/Off | Remote On/Off |
| 4               | +Vout         | +Vout         |
| 5               | -Vout         | Common        |
| 6               | Trim          | -Vout         |

- All dimensions in mm (inches)
- Tolerance: X.X±0.25 (X.XX±0.01)  
X.XX±0.13 (X.XXX±0.005)
- Pin pitch tolerance: ±0.25 (0.01)
- Pin tolerance: ±0.05 (0.002)

## Physical Characteristics

|               |   |  |
|---------------|---|--|
| Case Size     | : | 50.8x25.4x11mm (2.0x1.0x0.43 Inches)     |
| Case Material | : | Aluminium Alloy, Black Anodized Coating  |
| Base Material | : | FR4 PCB (flammability to UL 94V-0 rated) |
| Weight        | : | 30g                                      |

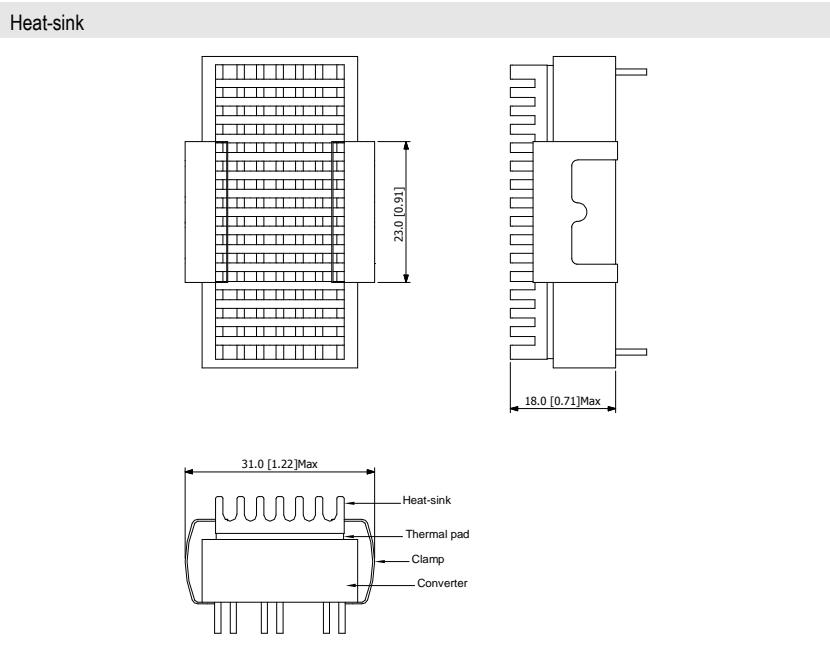

| Physical Characteristics |   |                        |
|--------------------------|---|------------------------|
| Heatsink Material        | : | Aluminum               |
| Finish                   | : | Black Anodized Coating |
| Weight                   | : | 9g                     |


► The advantages of adding a heatsink are:

1. To help heat dissipation and increase the stability and reliability of DC/DC converters at high operating temperature atmosphere.
2. To upgrade the operating temperature of DC/DC converters, please refer to Derating Curve.

## Test Configurations


### Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with a inductor Lin (4.7uH) and Cin (220uF, ESR < 1.0Ω at 100 KHz) to simulate source impedance. Capacitor Cin, offsets possible battery impedance. Current ripple is measured at the input terminals of the module, measurement bandwidth is 0-500 KHz.

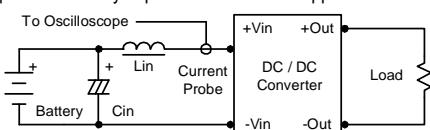

### Peak-to-Peak Output Noise Measurement Test

Use a 1uF ceramic capacitor and a 10uF tantalum capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC/DC Converter.

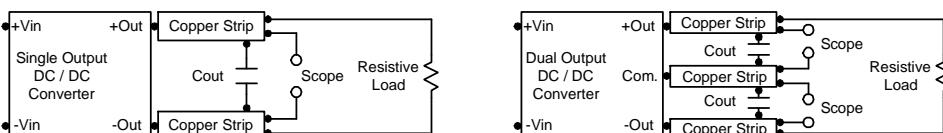

## Design & Feature Considerations

### Remote On/Off

Positive logic remote on/off turns the module on during a logic high voltage on the remote on/off pin, and off during a logic low. To turn the power module on and off, the user must supply a switch to control the voltage between the on/off terminal and the -Vin terminal. The switch can be an open collector or equivalent. A logic low is 0V to 1.2V. A logic high is 3.5V to 12V. The maximum sink current at the on/off terminal (Pin 3) during a logic low is -100uA. The maximum allowable leakage current of a switch connected to the on/off terminal (Pin 3) at logic high (2.5V to 100V) is 5uA.

### Overcurrent Protection

To provide hiccup mode protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure overload for an unlimited duration.


### Overvoltage Protection

The output overvoltage clamp consists of control circuitry, which is independent of the primary regulation loop, that monitors the voltage on the output terminals. The control loop of the clamp has a higher voltage set point than the primary loop. This provides a redundant voltage control that reduces the risk of output overvoltage. The OVP level can be found in the output data.

### Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup.

Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0Ω at 100 KHz) capacitor of a 33uF for the 12V input devices and a 10uF for the 24V and 48V devices.

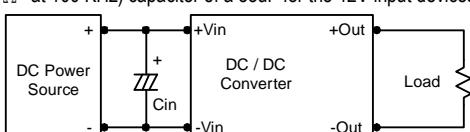

### Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 4.7uF capacitors at the output.




### Maximum Capacitive Load

The MKW40 series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the data sheet.


### Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 105°C. The derating curves are determined from measurements obtained in a test setup.



**Electromagnetic Emission EN 55022 Class A**

Conducted and radiated emissions EN55022 Class A

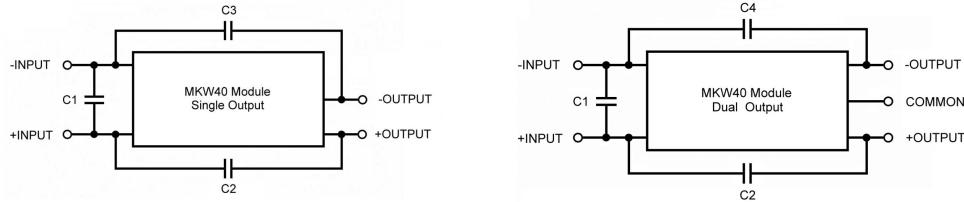


| Part No. | MKW40-12SXX          | MKW40-24SXX          | MKW40-48SXX          |
|----------|----------------------|----------------------|----------------------|
| C1       | 10uF/25V 1812 MLCC   | 4.7uF/50V 1812 MLCC  | 2.2uF/100V 1812 MLCC |
| C2 & C3  | 1000pF/2KV 1808 MLCC | 1000pF/2KV 1808 MLCC | 1000pF/2KV 1808 MLCC |

| Part No. | MKW40-12DXX          | MKW40-24DXX          | MKW40-48DXX          |
|----------|----------------------|----------------------|----------------------|
| C1       | 10uF/25V 1812 MLCC   | 4.7uF/50V 1812 MLCC  | 2.2uF/100V 1812 MLCC |
| C2 & C4  | 1000pF/2KV 1808 MLCC | 1000pF/2KV 1808 MLCC | 1000pF/2KV 1808 MLCC |

**External Output Trimming**

Output can be externally trimmed by using the method shown below

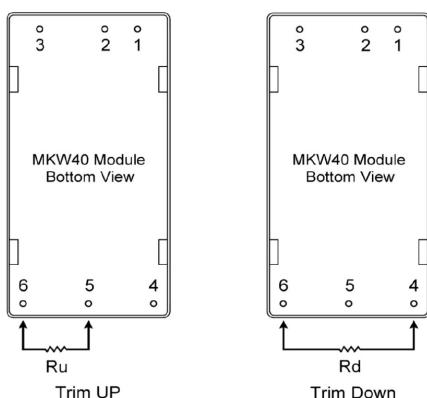
**MKW40-XXS033 Trim Table**

| Trim down | 1       | 2       | 3       | 4       | 5       | 6       | 7       | 8       | 9       | 10      | %     |
|-----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|-------|
| Vout=     | Vox0.99 | Vox0.98 | Vox0.97 | Vox0.96 | Vox0.95 | Vox0.94 | Vox0.93 | Vox0.92 | Vox0.91 | Vox0.90 | Volts |
| Rd=       | 63.59   | 30.28   | 18.19   | 11.95   | 8.13    | 5.56    | 3.70    | 2.31    | 1.21    | 0.34    | KOhms |
| Trim up   | 1       | 2       | 3       | 4       | 5       | 6       | 7       | 8       | 9       | 10      | %     |
| Vout=     | Vox1.01 | Vox1.02 | Vox1.03 | Vox1.04 | Vox1.05 | Vox1.06 | Vox1.07 | Vox1.08 | Vox1.09 | Vox1.10 | Volts |
| Rd=       | 70.50   | 29.28   | 16.87   | 10.90   | 7.38    | 5.06    | 3.42    | 2.20    | 1.25    | 0.49    | KOhms |

**MKW40-XXS05 Trim Table**

| Trim down | 1       | 2       | 3       | 4       | 5       | 6       | 7       | 8       | 9       | 10      | %     |
|-----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|-------|
| Vout=     | Vox0.99 | Vox0.98 | Vox0.97 | Vox0.96 | Vox0.95 | Vox0.94 | Vox0.93 | Vox0.92 | Vox0.91 | Vox0.90 | Volts |
| Rd=       | 45.53   | 20.61   | 12.31   | 8.15    | 5.66    | 4.00    | 2.81    | 1.92    | 1.23    | 0.68    | KOhms |
| Trim up   | 1       | 2       | 3       | 4       | 5       | 6       | 7       | 8       | 9       | 10      | %     |
| Vout=     | Vox1.01 | Vox1.02 | Vox1.03 | Vox1.04 | Vox1.05 | Vox1.06 | Vox1.07 | Vox1.08 | Vox1.09 | Vox1.10 | Volts |
| Rd=       | 36.57   | 16.58   | 9.92    | 6.59    | 4.59    | 3.25    | 2.30    | 1.59    | 1.03    | 0.59    | KOhms |

**MKW40-XXS12 Trim Table**

| Trim down | 1       | 2       | 3       | 4       | 5       | 6       | 7       | 8       | 9       | 10      | %     |
|-----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|-------|
| Vout=     | Vox0.99 | Vox0.98 | Vox0.97 | Vox0.96 | Vox0.95 | Vox0.94 | Vox0.93 | Vox0.92 | Vox0.91 | Vox0.90 | Volts |
| Rd=       | 394.50  | 179.74  | 106.08  | 68.86   | 46.39   | 31.36   | 20.60   | 12.51   | 6.21    | 1.17    | KOhms |
| Trim up   | 1       | 2       | 3       | 4       | 5       | 6       | 7       | 8       | 9       | 10      | %     |
| Vout=     | Vox1.01 | Vox1.02 | Vox1.03 | Vox1.04 | Vox1.05 | Vox1.06 | Vox1.07 | Vox1.08 | Vox1.09 | Vox1.10 | Volts |
| Rd=       | 368.92  | 161.92  | 94.97   | 61.86   | 42.12   | 29.00   | 19.66   | 12.66   | 7.23    | 2.89    | KOhms |

**MKW40-XXS15 Trim Table**

| Trim down | 1       | 2       | 3       | 4       | 5       | 6       | 7       | 8       | 9       | 10      | %     |
|-----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|-------|
| Vout=     | Vox0.99 | Vox0.98 | Vox0.97 | Vox0.96 | Vox0.95 | Vox0.94 | Vox0.93 | Vox0.92 | Vox0.91 | Vox0.90 | Volts |
| Rd=       | 572.67  | 248.63  | 145.60  | 94.97   | 64.87   | 44.92   | 30.72   | 20.10   | 11.86   | 5.28    | KOhms |
| Trim up   | 1       | 2       | 3       | 4       | 5       | 6       | 7       | 8       | 9       | 10      | %     |
| Vout=     | Vox1.01 | Vox1.02 | Vox1.03 | Vox1.04 | Vox1.05 | Vox1.06 | Vox1.07 | Vox1.08 | Vox1.09 | Vox1.10 | Volts |
| Rd=       | 392.98  | 182.12  | 108.73  | 71.43   | 48.85   | 33.71   | 22.86   | 14.69   | 8.33    | 3.23    | KOhms |